(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 19 May 2005 (19.05.2005)

PCT

(10) International Publication Number WO 2005/044460 A2

(51) International Patent Classification7:

B03C 1/00

(21) International Application Number:

PCT/FI2004/000658

(22) International Filing Date:

9 November 2004 (09.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


11 November 2003 (11.11.2003) 20031635

- (71) Applicant (for all designated States except US): THERMO ELECTRON OY [FI/FI]; Ratastie 2, FI-01620 Vantaa (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KÄRMENIEMI, Timo [FI/FI]; Versokuja 2 A 6, FI-00790 Helsinki (FI). TUUNANEN, Jukka [FI/FI]; Koivikkotie 20 C, FI-00630 Helsinki (FI).

- (74) Agent: BERGGREN OY AB; P. O. Box 16 (Jaakonkatu 3 A), FI-00101 Helsinki (FI).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PARTICLE SEPARATING DEVICE

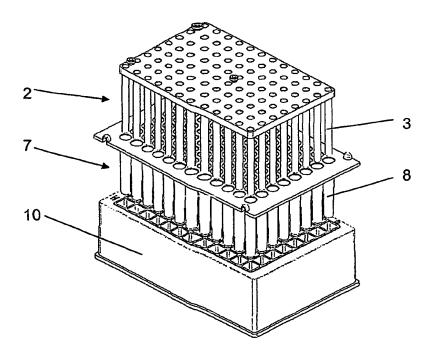

(57) Abstract: The invention relates to a device (2) for separating magnetic particles comprising several substantially aligned magnets (3). Some of the magnets (3) are inversely oriented. This array reduces any magnetic interference with the collection area of an adjacent magnet.



WO 2005/044460 A2



Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.